




Functionality without compromises!

The HHT100 series handheld devices come with various configuration options to cater the requirements of various Industrial Verticals. The terminal is 6 ft drop resistant and comes with the choice of IP54, IP65 protection. The choice of Windows CE or Embedded Linux or Native Firmware is provided to suit the different cost/performance requirements. Unlimited expandability options such as, Wi-Fi, Bluetooth, Printers, RF-ID, Bar Code Scanners, Camera, and USB, the HHT100 series Handheld is configured and shipped from the factory. HHT100 series devices give the Power of Choice and Price to the end user.

Features

- HHT100 is designed keeping form and functionality in mind.
- Works efficiently in retail as well as harsh Industrial environment.
- Wide range of wireless connectivity options (Wi-Fi, GPRS/EDGE, and Bluetooth).
- Built in Microphone - Speaker along with 3.5 mm jack gives VOIP capability.
- Wide range of expansion options for specific applications.
- Different color choices.
- Customizable Keypad.
- Availability of Implantaire's design team for any custom applications/firmware requirement.

Details

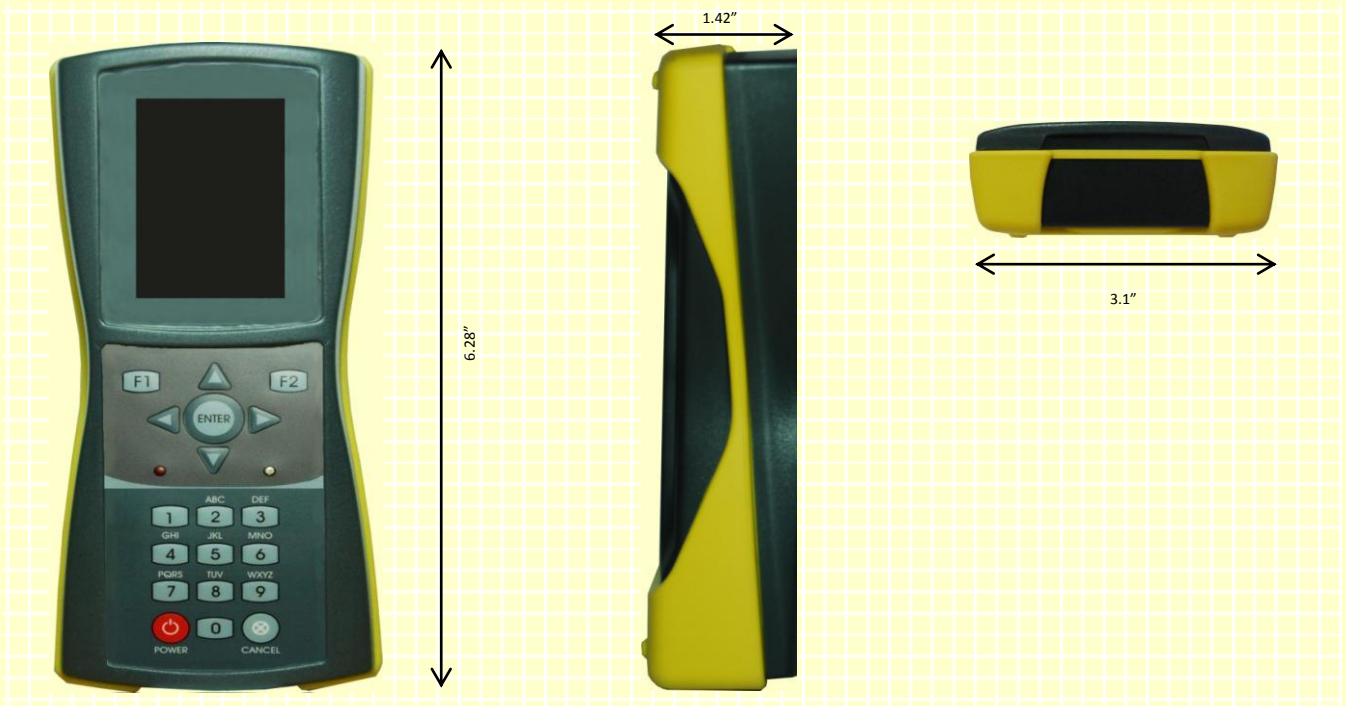

In the Box

High Capacity Li-Ion Batteries –Rechargeable	Standard Warranty
Battery Charger Adapter	Carry Case
USB Cable	Operation Manual
Holster	CD

Specifications

Base Configuration		Environment	
CPU	ARM Core	Drop Durability	Approximate 1.8m / 6 Ft.
OPERATING SYSTEM	WINDOWS MOBILE/LINUX	Dust/Water-Splash Proof	IP 54 / IP 65
RAM/FLASH (MB)	256/256	Operating Temperature	-20° C to +60° C / -4° F to + 140° F
Display	2.4" OLED, 320X240, LED Backlit, 256K Colors	Operating Humidity	10% to 80% RH (No Condensation)
Input (Keypad)	Customizable (for minimum order of 25 nos.) Default: Alphanumeric, w/Navigation & Function Keys	Storage Temperature	-20° C to +70° C / -4° F to + 158° F
Wireless	802.11b/g, Bluetooth	Storage Humidity	5% to 90% RH (No Condensation)
Interfaces	SIM, Micro SD, Mini USB 2.0	Dimensions	6.28" (L) x 3.1" (W) x 1.42" (H)
Audio	Speaker, Microphone	Weight	240 g
Camera	1.3 M CMOS		
Battery	Li-ion		
Optional Interfaces		Compliance	
	RS232 Serial		EN60950-1
	RS485		EN55022
	CAN		EN61000-3-2
	RF-ID Scanner		EN61000-3-3
	Fingerprint Reader		CFR 47 Part 15 Subpart B
	Printer		CE



iEmbed is a registered trademark of Implantaire Technologies
 Windows and the Windows Logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.
 Specifications and designs are subject to change without notice.